

SL	DATE	REMARKS	BY	CHECK	APPL

Ultimately, the CTF approved the use of the two cross-sections illustrated below to be utilized as the starting point for conceptual design. The complete roadway layout will be refined through the final design process:

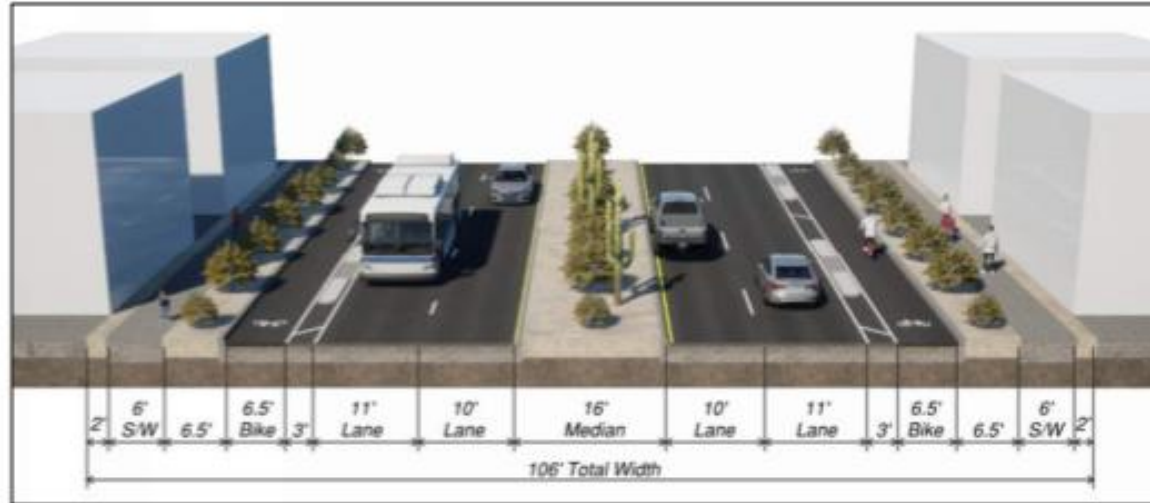


Figure 41 - Preferred Roadway Cross-Section

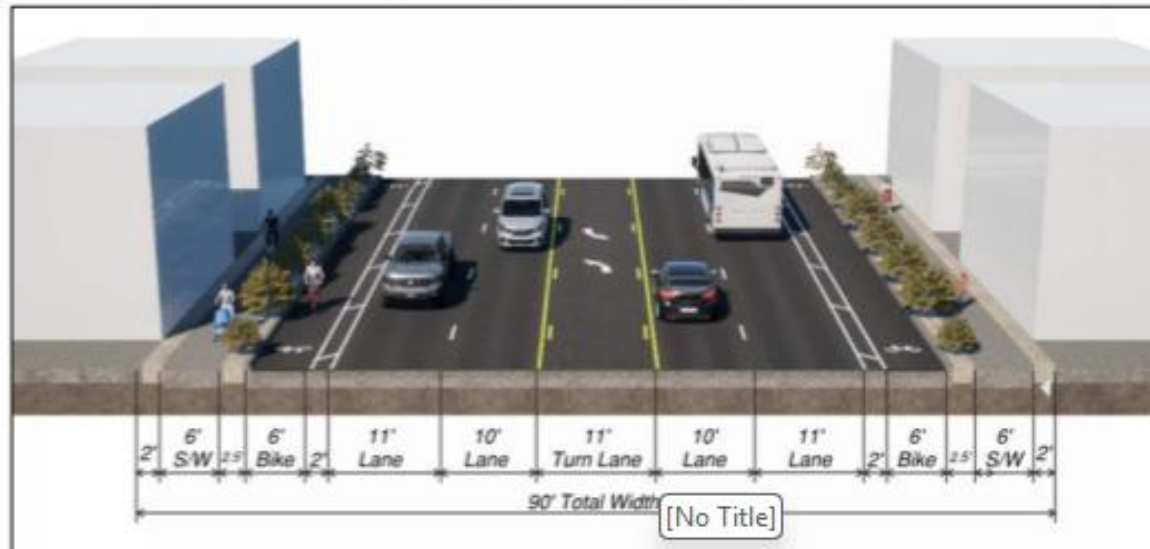


Figure 42 – CTF Selected Narrowed Roadway Cross-Section

14 Recommended Roadway Alignment Alternative

Utilizing the Project Goals and associated Design Strategies, the design team was able to create the Recommended Roadway Alignment Alternative. This alternative provides the preferred roadway cross-section for the majority of the corridor, and narrow roadway cross-section between Prince Road and Roger Road. By utilizing the curvilinear to acquire necessary right-of-way width from both sides of 1st Avenue, this alternative minimizes the not only the cost of right-of-way acquisition, but reduces the impact to the existing business and homes, and preserves much of the existing character along the corridor.



Figure 52 - Recommend Roadway Alignment. Approved by the CTF and Presented at the Phase III Outreach Open House

GENERAL NOTES

- HORIZONTAL CONTROL:**
HORIZONTAL DATUM: ARIZONA COORDINATE SYSTEM, NORTH AMERICAN DATUM (NAD) 1983 (2011) WITH 2010 EPOCH, CENTRAL ZONE 0202, IN INTERNATIONAL FEET, USING A COMBINED SCALE FACTOR (CF), 0.9999910 (1/CF = 1.00010901188). SURFACE NORTHING AND EASTING COORDINATES ARE DERIVED BY DIVIDING THE STATE PLANE GRID COORDINATES BY THE COMBINED SCALE FACTOR (SURFACE VALUE=GRID VALUE/CF).
- BASIS OF BEARING:**
THE BASIS OF BEARING FOR THIS PROJECT IS NORTH 00°02'30" WEST, AND WAS DERIVED USING THE PREVIOUSLY DESCRIBED HORIZONTAL DATUM AND OBSERVED LOCATIONS OF POINT NO. 600 AN ESTABLISHED 1/2" REBAR FLUSH WITH NO TAG LOCATED AT THE SOUTHEAST CORNER OF SECOND (2ND) AVENUE AND GRANT ROAD LAYING 19 FEET EAST OF 2ND AVENUE'S EAST RIGHT-OF-WAY LINE TO POINT NO. 606 A PIMA COUNTY'S ONLINE POSITIONING USER SERVICE (OPUS) "13S13E, N25 AND ALSO KNOWN AS PIMA COUNTY SURVEY DESIGNATION "NN-148 WHICH IS A FOUND 3/16" STAINLESS STEEL PIN IN PVC SLEEVE INCASED IN CONCRETE WITH NO LID, THE RIM IS STAMPED "NN-148 1991" LAYING 0.30' BELOW GROUND, AND LOCATED 750 FEET SOUTH OF THE INTERSECTION OF RIVER ROAD AND FIRST (1ST) AVENUE AND 48 FEET WEST OF THE RANGE LINE BETWEEN SECTION 24 OF T.13S, R.13E, AND SECTION 19 OF T.13S, R.14E., OF GILA AND SALT RIVER MERIDIAN, THE HORIZONTAL SURFACE DISTANCE BETWEEN THESE TWO MONUMENTS IS 15749.11 FEET.
- VERTICAL CONTROL:**
THE BASIS OF ELEVATION (B.O.E.) AND PRIMARY HORIZONTAL CONTROL POINT FOR THIS PROJECT IS POINT NO. 506 A PIMA COUNTY'S ONLINE POSITIONING USER SERVICE (OPUS) "13S13E, N25 AND ALSO KNOWN AS PIMA COUNTY SURVEY DESIGNATION "NN-148 WHICH IS A FOUND 3/16" S TAINLESS STEEL PIN IN PVC SLEEVE INCASED IN CONCRETE WITH NO LID, THE RIM IS STAMPED "NN-148 1991" LAYING 0.30' BELOW GROUND, AND LOCATED 750 FEET SOUTH OF THE INTERSECTION OF RIVER ROAD AND 1ST AVENUE AND 48 FEET WEST OF THE RANGE LINE BETWEEN SECTION 24 OF T.13S, R.13E, AND SECTION 19 OF T.13S, R.14E., OF GILA AND SALT RIVER MERIDIAN, AS SHOWN ON PIMA COUNTY GPS OCCUPATION SHEET PID - GPS0143, AND HAVING AN ORTHOMETRIC ELEVATION = 2322.01 FEET BASED UPON NORTH AMERICAN VERTICAL DATUM (NAVD) 1988 INTERNATIONAL FEE, AND USING GEOID18.
- THE PRIMARY CONTROL POINT IS THE SAME PIMA COUNTY DOT OPUS CONTROL POINT "13S13E, N25" AS DESCRIBED UNDER VERTICAL CONTROL, WHICH IS AN OPUS RESOLVED STATIC SOLUTION. THE SECONDARY CONTROL POINTS WERE ESTABLISHED FOR THIS PROJECT BASED UPON THE PRIMARY CONTROL POINT. THE CONTROL POINTS USED FOR THIS PROJECT HAVE THE FOLLOWING COORDINATE VALUES:**

POINT & NAME	NORTHING INTERNATIONAL FEET	EASTING INTERNATIONAL FEET	ORTHOMETRIC ELEVATION INTERNATIONAL FEET
PRIMARY CONTROL PT. & B.O.E.			
13S13E, N25 2011 GRID PT. #606			
13S13E, N25 2011 GRID SURFACE			
SECONDARY CONTROL PTS.			
EPS CP PT. #600 2011 GRID	455,991.8630	995,235.8940	
1/2" REBAR SURFACE	456,041.5720	995,344.3870	2415.22
LOCATED NORTHEAST OF NORTH STREET AND 2ND AVENUE.			
EPS CP PT. #604 2011 GRID	462,701.2200	995,560.2240	
1/2" REBAR SURFACE	462,751.6600	995,668.7520	2354.20
LOCATED EAST OF FIRST AVENUE IN ALLEY BETWEEN FREEMAN PLACE AND HOLMAN DRIVE.			
EPS CP PT. #607 2011 GRID	471,224.0410	995,327.2250	
1/2" REBAR SURFACE	471,275.4110	995,435.7280	2323.79
LOCATED SOUTHEAST OF FIRST AVENUE AND BROMLEY STREET.			
- ALL STATIONING SHOWN ON THE PLANS AND PROFILES IS ALONG THE CONSTRUCTION CENTERLINE UNLESS OTHERWISE NOTED.
- ALL CONSTRUCTION SHALL CONFORM TO 2015 EDITION OF THE PIMA ASSOCIATION OF GOVERNMENTS (PAG) STANDARD SPECIFICATIONS AND DETAILS FOR PUBLIC IMPROVEMENTS EXCEPT AS MODIFIED IN THE CONTRACT SPECIFICATIONS OR PLANS. PAVEMENT MARKING SHALL CONFORM TO THE PC/COT SIGNING & PAVEMENT MARKING DESIGN MANUAL, 2020 FIRST EDITION, REFERENCED ADOT STANDARDS ARE PER THE LATEST EDITION ADOT BRIDGE GROUP STRUCTURE DETAIL DRAWINGS, CONSTRUCTION STANDARD DRAWINGS, & SIGNING AND MARKING STANDARD DRAWINGS.
- EXISTING OVERHEAD ELECTRIC, TELEPHONE AND CABLE T.V. UTILITIES AND UNDERGROUND ELECTRIC, GAS, T.V. AND TELEPHONE UTILITIES WILL BE RELOCATED BY OTHERS.
- SURVEY MONUMENTS WILL BE FURNISHED AND PLACED BY THE CONTRACTOR PER PAG STD. DTL. 103 SHT. 1 OF 3 OR SHT. 2 OF 3. SEE GEOMETRIC LAYOUT AND PAVING PLAN AND PROFILE SHEETS FOR LOCATIONS.
- ALL SURVEY MONUMENTS SHALL BE ESTABLISHED BY A LAND SURVEYOR REGISTERED IN THE STATE OF ARIZONA, AND A RECORD OF SURVEY WILL BE PROVIDED.
- RADI ARE MEASURED TO FRONT FACE OF CURB PER C.O.T. STANDARDS.
- CONSTRUCTION ZONE TRAFFIC CONTROL SHALL CONFORM TO THE REQUIREMENTS OF THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES", U.S. DEPARTMENT OF TRANSPORTATION, FEDERAL HIGHWAY ADMINISTRATION, EDITION OF 2023, AND THE SPECIAL PROVISIONS.
- CONTRACTOR SHALL COMPLY WITH ALL APPLICABLE OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION REGULATIONS.
- SOUTHWEST GAS HAS VALVES WITHIN THE PROJECT AREA THAT MAY NEED TO BE PROTECTED AND ADJUSTED TO FINAL GRADE. THE CONTRACTOR MUST CONTACT SOUTHWEST GAS FOR ADJUSTING VALVES AT LEAST TWO WEEKS PRIOR TO THE START OF CONSTRUCTION BY CALLING (520) 794-8208.
- SOUTHWEST GAS REQUIRES A 1-FOOT MINIMUM SEPARATION WHEN CROSSING ITS DISTRIBUTION FACILITIES AND A 3-FOOT MINIMUM SEPARATION WHEN CROSSING HIGH PRESSURE MAINS.
- SWPPP MEASURES SHALL BE INSTALLED SO AS TO PREVENT ALL STORM WATER, CONSTRUCTION WATER, FUELS, CHEMICALS OR LIQUIDS FROM BEING DIRECTED INTO OR ONTO ANY SANITARY SEWER FACILITIES. PROTECTION OF SANITARY SEWER FACILITIES SHALL BE A PART OF THE APPROVED CONSTRUCTION SWPPP AND BEST MANAGEMENT PRACTICES. PROTECTION DEVICES SHALL BE INSTALLED AND MAINTAINED AROUND ALL POTENTIALLY AFFECTED SANITARY SEWER FACILITIES WITHIN THE PROJECT LIMITS. ADDITIONAL MEASURES SHALL INCLUDE BUT NOT BE LIMITED TO THE USE OF RAIN STOPPERS AND WATERPROOF MANHOLE COVERS AS DEEMED NECESSARY BY THE PIMA COUNTY REGIONAL WASTEWATER RECLAMATION DEPARTMENT.
- THE CONTRACTOR SHALL VERIFY EXISTENCE OF ALL UTILITIES BY CALLING BLUE STAKE AT 1-800-782-5348 48 HOURS PRIOR TO CONSTRUCTION. ALL EXISTING UTILITY LOCATIONS ARE APPROXIMATE, AND ARE SHOWN USING THE BEST AVAILABLE DATA. THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE DEPTH AND HORIZONTAL LOCATION OF ALL UNDERGROUND UTILITIES PRIOR TO CONSTRUCTION. ANY AND ALL DAMAGE DONE BY THE CONTRACTOR TO EXISTING UTILITIES DURING CONSTRUCTION SHALL BE THE FAULT OF THE CONTRACTOR, WITH THE CONTRACTOR BEARING ALL FINANCIAL RESPONSIBILITY.
- THE CONTRACTOR SHALL INSTALL ALL PERMANENT PAVEMENT MARKINGS, AND ALL PERMANENT TRAFFIC CONTROL SIGNS.

- THE CONTRACTOR SHALL MAINTAIN ACCESS TO ALL DRIVEWAYS, ALLEYS, AND MAILBOXES DURING CONSTRUCTION. THE CONTRACTOR WILL NOT RESTRICT EMERGENCY VEHICLES, US POSTAL DELIVERY, SOLID WASTE COLLECTIONS AND/OR ACCESS TO THE ADJACENT PROPERTIES EXCEPT AS APPROVED BY THE ENGINEER.
- A COPY OF THESE PLANS SHALL BE KEPT IN AN EASILY ACCESSIBLE LOCATION ON THE SITE AT ALL TIMES DURING CONSTRUCTION.
- ANY EXCESS EXCAVATED MATERIAL SHALL BECOME THE PROPERTY OF THE CONTRACTOR, AND SHALL BE REMOVED FROM THE PROJECT SITE BY THE CONTRACTOR.
- IN THE EVENT THAT HUMAN REMAINS, INCLUDING HUMAN SKELETAL REMAINS, CREMATIONS, AND/OR FUNERARY OBJECTS ARE FOUND DURING EXCAVATION OR VICINITY OF THE DISCOVERY, STATE LAWS ARS 41-865 AND ARS 41-844 REQUIRE THAT THE ARIZONA STATE MUSEUM BE NOTIFIED OF THE DISCOVERY AT (520) 621-4795 SO THAT CULTURAL GROUPS WHO CLAIM CULTURAL OR RELIGIOUS AFFINITY TO THEM CAN MAKE APPROPRIATE ARRANGEMENTS FOR THE REPATRIATION AND REBURIAL OF THE REMAINS. THE HUMAN REMAINS WILL BE REMOVED FROM THE SITE BY A PROFESSIONAL ARCHAEOLOGIST PENDING CONSULTATION AND REVIEW BY THE ARIZONA STATE MUSEUM AND THE CONCERNED CULTURAL GROUPS.
- THE CONTRACTOR SHALL NOT DAMAGE NATURAL GROWTH WITHIN PRIVATE PROPERTY. ALL WORK SHALL BE DONE WITHIN EASEMENTS, ROADWAYS, AND ALLEYS.
- WHEN MATCHING EXISTING PAVEMENT OR CURB AND GUTTER, THE CONTRACTOR MUST VERIFY EXISTING ELEVATIONS TO ENSURE PROPER DRAINAGE AND GRADES. ANY DISCREPANCIES WITH THE PLANS SHALL BE IMMEDIATELY BROUGHT TO THE ATTENTION OF THE ENGINEER.
- IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO FURNISH, HAIL, AND APPLY ALL WATER REQUIRED FOR COMPACTION, AND FOR THE CONTROL OF DUST FROM CONSTRUCTION ACTIVITY. THE COST FOR THIS WORK IS TO BE INCLUDED IN THE CONSTRUCTION PRICE.
- DIMENSIONS SHALL NOT BE SCALED FROM THE DRAWINGS.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE CARE, MAINTENANCE, REPAIR OR REPLACEMENT OF EXISTING IMPROVEMENTS IN THE WORK AREA WHICH HAVE BEEN REMOVED OR DAMAGED DURING THE COURSE OF CONSTRUCTION. ALL REPAIR, REPLACEMENT, OR CLEANUP SHALL BE DONE TO THE SATISFACTION OF THE OWNER.
- OMISSIONS OR CONFLICTS BETWEEN VARIOUS ELEMENTS OF THE DRAWINGS, NOTES AND DETAILS SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER AND RESOLVED BEFORE PROCEEDING WITH THE WORK.

INDEX OF SHEETS

SHEET NUMBER	SHEET TYPE
1	COVER SHEET
2 - 3	DESIGN SHEETS
4 - 9	TYPICAL SECTIONS & PAVEMENT SECTIONS
10 - 14	PIPE SUMMARY SHEET
15 - 24	DRAINAGE DETAILS
25 - 69	GEOMETRIC LAYOUT SHEET
70 - 172	ROADWAY PLAN & PROFILE SHEETS
173 - 209	DEMOLITION PLAN
210 - 219	STORM DRAIN PLAN & PROFILE SHEETS
220 - 257	STRIPING PLAN
258 - 294	LIGHTING PLAN
295 - 324	SIGNAL PLAN
325 - 365	HARDSCAPE PLAN
366 - 405	PLANTING PLAN
406 - 447	IRRIGATION PLAN
448 - 450	BRIDGE AESTHETICS
451 - 455	RETAINING WALL SHEETS
456 - 464	BRIDGE PLAN SHEETS
465 - 504	RECORD OF SURVEY

DESIGN SHEET

SHEET 1 OF 2

Record Document
Date: 06/06/2024



30%
DESIGN CONCEPT
SUBMITTAL
Preliminary
Not For
Construction

DEPARTMENT OF TRANSPORTATION AND MOBILITY/ENGINEERING DIVISION				2
1ST AVENUE, GRANT ROAD TO RIVER ROAD - ROADWAY IMPROVEMENTS				504
CITY OF TUCSON	DESIGNED BY [Signature]	CHECKED BY [Signature]	APPROVED BY [Signature]	DATE 06/06/2024
PLAN NO. R-2024-XXX				

1ST AVE DESIGN DATA

DESIGN SPEED = 45 MPH
POSTED SPEED = 30 MPHGRANT ROAD TO GLENN STREET
2026 ADT = 25,089
2045 ADT = 28,100GLENN STREET TO FORT LOWELL ROAD
2026 ADT = 27,480
2045 ADT = 31,100FORT LOWELL ROAD TO PRINCE ROAD
2026 ADT = 33,087
2045 ADT = 36,800PRINCE ROAD TO ROGER ROAD
2026 ADT = 30,851
2045 ADT = 34,000ROGER ROAD TO LIMBERLOST DRIVE
2026 ADT = 30,143
2045 ADT = 33,000LIMBERLOST DRIVE TO WETMORE ROAD
2026 ADT = 30,804
2045 ADT = 33,900WETMORE ROAD TO RIVER ROAD
2026 ADT = 29,758
2045 ADT = 31,500

DESIGN VEHICLE

COLLECTOR AND LOCAL INTERSECTIONS
TYPICAL WB-40
CHECK CITY-BUS

LENGTH OF PROJECT

1ST AVENUE CONST. @ STA. 13+82.62 TO STA. 182+00 = 16,817.38' = 3.19 MILES

LEGEND

LEGEND USED IS PER PAG STANDARD DETAIL FOR PUBLIC
IMPROVEMENTS 2015 EDITION DETAIL 100 AND 101 AS
FOLLOWS:

NEW



EXISTING



ITEM

TRAFFIC SIGNAL (TWO HEAD)

GUY WIRE AND/OR GUY POLE

UTILITY POLE

TELEPHONE MANHOLE

PAVEMENT REMOVAL

NEW STORM DRAIN

NEW RIGHT OF WAY

EXISTING RIGHT OF WAY

TEMPORARY CONST. ESMT.

NEW PAVEMENT

MILL AND OVERLAY



BID ITEM LEGEND

ITEM NO.	Symbol	Description
9080041		Concrete Vertical Curb - Type 2 PAG Std. Dtl. 209, H=6"
908000X		2' Roll Curb - Type C MAG Std. Dtl. 220-1
9080006		Concrete Wedge Curb PAG Std. Dtl. 209
9080305		Concrete Driveway See Detail X
9080203		Concrete Sidewalk PAG Std. Dtl. 200
9080204		Concrete Bus Stop Pad PAG Std. Dtl. 209 (6" Thick)
9080205		Bus Stop Shelter
[No Title]		Concrete Access Ramp PAG Std. Dtl. 207
9080290		Concrete Access Ramp See Detail X
9080293		Concrete Access Ramp See Detail X
9080294		Concrete Access Ramp See Detail X
9080295		Shared-Use Path

EARTHWORK SUMMARY

ROADWAY EXCAVATION	54,226 C.Y.
DRAINAGE EXCAVATION	473 C.Y.
TOTAL EXCAVATION	54,699 C.Y.
ROADWAY EMBANKMENT	11,709 C.Y.
WASTE	48,733 C.Y.
BORROW	3,216 C.Y.

Note:

- Earthwork volumes presented are inclusive of both project phases:
Phase 1: River Road to Wetmore Road, Phase 2: Wetmore Road to Grant Road.
- Earthwork quantities presented in this summary do not include shrink or swell.




DESIGN SHEET

SHEET 2 OF 2

REV.	DATE	DESCRIPTION	BY	CHECK	APPROVE

30%
DESIGN CONCEPT
SUBMITTAL
Preliminary
Not For
Construction

DEPARTMENT OF TRANSPORTATION AND MOBILITY/ENGINEERING DIVISION				3
1ST AVENUE, GRANT ROAD TO RIVER ROAD - ROADWAY IMPROVEMENTS				504
CITY OF TUCSON	DRAWN BY [Signature]	CHECKED BY [Signature]	APPROVED BY [Signature]	PLAN NO. R-2024-XXX

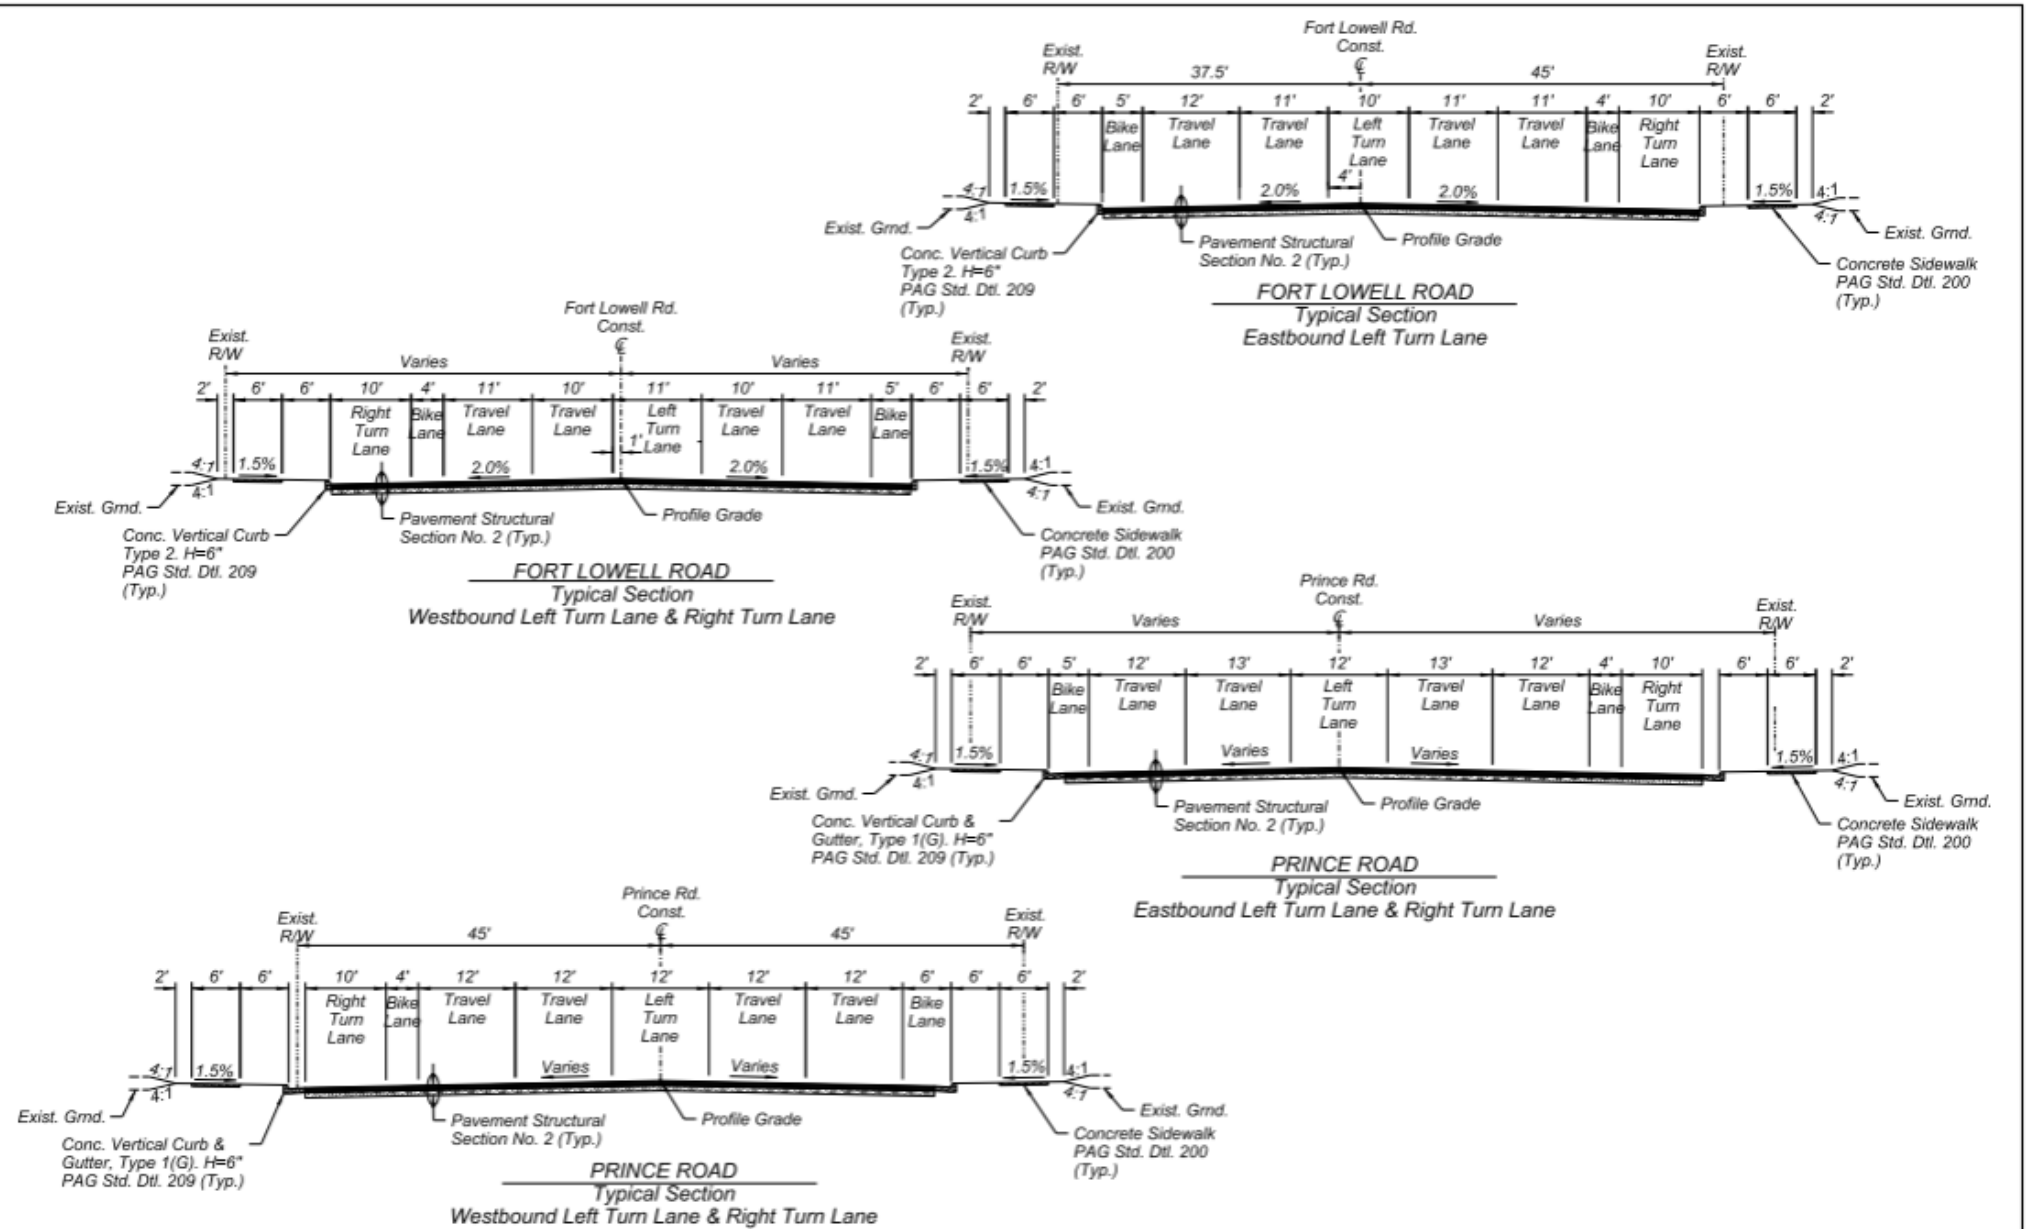

TYPICAL SECTIONS







SHEET 4 OF 6

Record Document
Date: 11/11/2019



30%
DESIGN CONCEPT
SUBMITTAL
Preliminary
Not For
Construction

DEPARTMENT OF TRANSPORTATION AND MOBILITY/ENGINEERING DIVISION				7
1ST AVENUE, GRANT ROAD TO RIVER ROAD - ROADWAY IMPROVEMENTS				504
CITY OF TUCSON	DESIGNED BY JUL 2019	DRAWN BY JUL 2019	APPROVED BY JUL 2019	PLAN NO. R-2024-XXXX

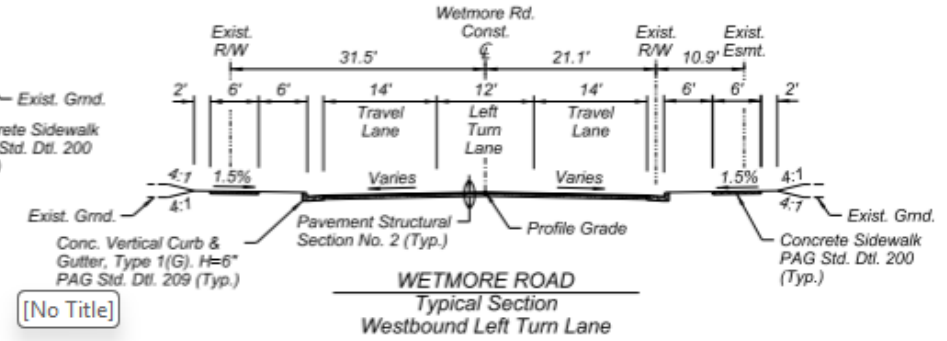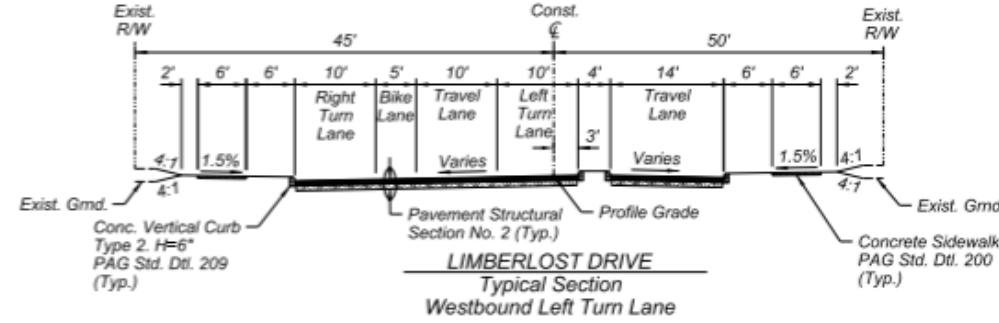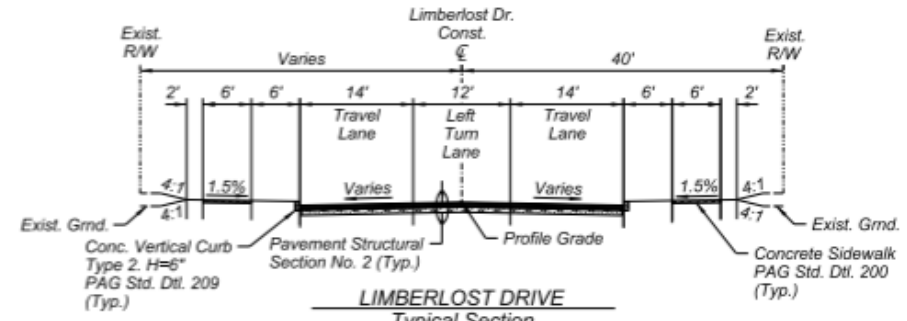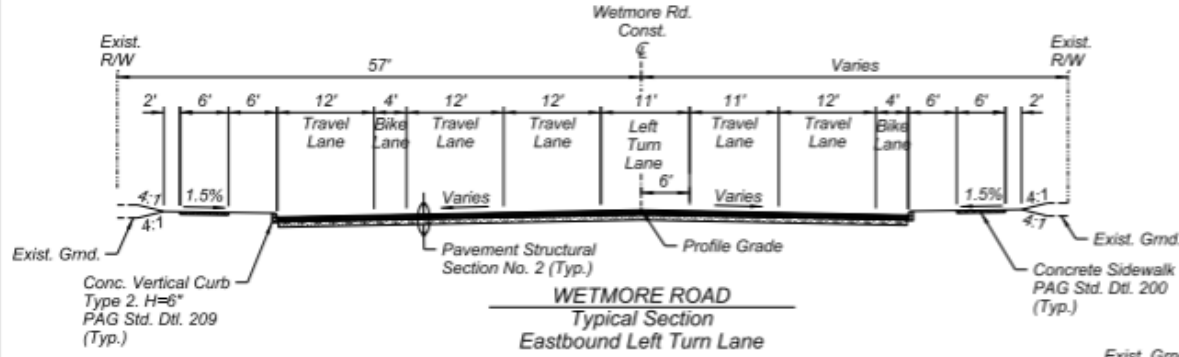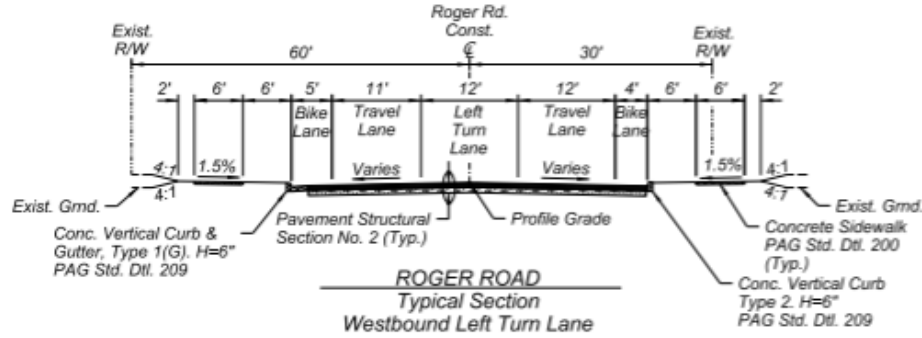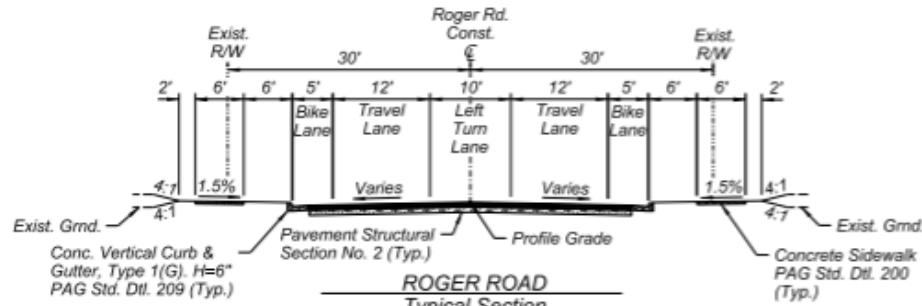

[No Title]

TYPICAL SECTIONS

SHEET 5 OF 6

Record Document
Date: 06/06/2024



NO.	DATE	BY	CHKD	APPR
1	06/06/2024			
2				
3				
4				
5				
6				
7				
8				
9				
10				

30%
DESIGN CONCEPT
SUBMITTAL
Preliminary
Not For
Construction

DEPARTMENT OF TRANSPORTATION AND MOBILITY/ENGINEERING DIVISION				8
1ST AVENUE, GRANT ROAD TO RIVER ROAD - ROADWAY IMPROVEMENTS				504
CITY OF TUCSON	DESIGNED BY [Signature]	CHECKED BY [Signature]	APPROVED BY [Signature]	DATE 11/16/2024
PROJECT NO. R-2024-XXX				

